

# National Agricultural Library

REG-10160240

Relais

SAM TESTA  
ARS  
MSA/NATIONAL SEDIMENTATION LABORATORY  
PO BOX 1157, 598 MCELROY DRIVE  
OXFORD, MS 38655

ATTN: SUBMITTED:  
PHONE (662) 232-2933 PRINTED: 2003-09-25 11:07:53  
:  
FAX: REQUEST NOREG-10160240  
E-MAIL SENT VIA: Manual

-----  
REG Regular Copy Journal  
-----

DELIVERY: E-mail: stesta@ars.usda.gov  
REPLY: Mail:

THIS IS NOT A BILL.

NOTICE: THIS MATERIAL MAY BE PROTECTED BY COPYRIGHT LAW

----National-Agricultural-Library/-Document-Deliver-----

0H96

E 160240

AIISB

9/24/03

-----  
SEP23NAL06 Date Not Needed After: 12/31/03

SAM TESTA  
ARS, USDA, MSA, NATIONAL SEDIMENTATION LABORATORY  
PO BOX 1157, 598 MCELROY DRIVE  
OXFORD, MS 38655  
Patron ID: 101061

Cooper, C. M., Moore, M. T., Bennett, E. R., Smith, Jr., S. and Farris, J. L.  
Alternative environmental benefits of agricultural drainage ditches. ✓  
Verh. Int. Ver. Theor. Limnol. (SIL)  
Vol 28:1678-1682. 2002 S<sup>2</sup>

I have read the warning on copyright restrictions and accept full responsibility for compliance.

Maximum Cost: n/a

SAM TESTA 9/23/03 Phone# (662) 232-2933  
ARIEL IP Address: 130.74.184.144  
stesta@ars.usda.gov  
-----  
-----

SEP 24 2003

## Alternative environmental benefits of agricultural drainage ditches

Charles M. Cooper, Matthew T. Moore, Erin R. Bennett, Sammie Smith, Jr. and  
Jerry L. Farris

### Introduction

Agricultural drainage ditches have received mixed reviews pertaining to their influence, role, and definition within the agricultural ecosystem. In the early part of the 20th Century, drainage ditches were viewed as a positive means to reduce mosquito-infested wetlands and convert them into valuable agricultural production acreage (GRUMBLES 1991). In recent decades, however, there has been a concerted effort to attain a 'no net loss' of wetland acreage. This has placed drainage ditches in a precarious situation. They are needed to maintain field drainage, yet frequently their own characteristics may identify them as being wetlands themselves. Many drainage ditches possess the three macrofeatures of any wetland: hydroperiod, hydrosol, and hydrophytes. There is, however, a fundamental difference in how agricultural drainage ditches are defined. For the purpose of the present study, drainage ditches are limited to those structures created to drain production acreage – not marginal wetlands.

Within the agricultural community, drainage ditches have been viewed as conduits for removing water from production acreage. The public perception has generally been negative in recent years, because constructed ditches have replaced natural drainage systems. Drainage ditches have largely been ignored in scientific research. Research from the Netherlands has focused on drainage ditch maintenance issues (VAN STRIEN et al. 1989, 1991), while DRENI & KERSTING (1992) reported the use of experimental drainage ditches for ecotoxicological evaluations. Until now, little information has been available on the potential mitigation capabilities of drainage ditches.

By viewing drainage ditches as buffers between production acreage and downstream aquatic receiving systems, it is possible to increase the water quality of agricultural runoff following storm events. Therefore, ditches may serve as an alternative best management practice (BMP). Historical BMPs related to agricultural land include, but are not limited to, winter cover crops, stiff grass hedges, riparian

zones, grass filter strips, constructed wetlands, and conservation tillage. Most BMP research has been performed in the capacity of reducing sediment and nutrient-laden agricultural runoff (BUTLER et al. 1974, HAYES & HAIRSTON 1983, HAYES et al. 1984, LEFF et al. 1989, BARLING & MOORE 1994). Little to no research has attempted to document the capability of vegetated agricultural drainage ditches in the mitigation of pesticide-associated stormwater runoff. If drainage ditches, as proposed, serve as an effective means for the mitigation of pesticide-associated stormwater runoff, farmers and landowners will have a low-cost, environmentally beneficial BMP alternative.

### Materials and methods

Simulated pesticide storm runoff was achieved through two different controlled-release experiments, beginning in the summer of 1998. Both experiments were conducted within the Mississippi Delta Management Systems Evaluation Area (MDMSEA) (SCHIRFIBER et al. 1996a, b) (Fig. 1). The first experiment was conducted on a 50-m reach of a vegetated agricultural drainage ditch within the Beasley Lake watershed. With a top ditch width of approximately 4 m, a depth of 1.3 m, and a bottom slope of 0.004, the drainage ditch discharge during the simulated event was 3680 L h<sup>-1</sup>. Experimental sampling sites were established at the runoff point of entry, 10 m above the point of entry, and 10, 20, 40, and 50 m below the point of entry. A mixture of the herbicide atrazine (2-chloro-4-ethylamino-6-isopropylamino-s-triazine) and the insecticide lambda-cyhalothrin (λ-cyano-3-phenoxybenzyl-3-(2-chloro-3,3,3-trifluoro-1-enyl)-2,2-dimethyl cyclopropanecarboxylate), simulating pesticide runoff from a 10-ha field, was applied to the drainage ditch segment. Aqueous samples were collected at 0 min, 60 min, 90 min, 120 min, 150 min, 180 min, 24 h, 7 days, 14 days, and 28 days. Sediment and plant samples were also collected at all sampling intervals except 90 min, 120 min, and 150 min. Atrazine and lambda-cyhalothrin are most commonly used for pest con-

Fig. 1. Mississippi, USA.

control in corn (*Zea m. m. tatum*). The dominant ditch included

In 1999, the ditch m vegetated agricul Thughman Lake, ditch had an approx water width and di tively. Sampling sit the point of entry, 75, 100, 200, 400 entry. Two pyrethr thrin and bifenthr methyl 3-(2-chloro dimethyl-cyclopro amended into the from a 20-ha field every 15 min for 12 h, 24 h, 7 days, days. Sediment an all sampling inter study, as well as at mixtures were am ment particulates concentration scem lambda-cyhalothru trol in corn and co were the dominant drainage ditch. For concentrations wet and potential pest CHOPE 1978) Sam

## drainage ditches

Smith, Jr. and

, constructed wetlands, and most BMP research has been focused on reducing sediment and agricultural runoff (BUTLER et al. 1983, HAYFS et al. 1984, G & MOORE 1994). Little is known to document the capabilities of agricultural drainage ditches in the associated stormwater runoff reduction. Proposed, severe an effective reduction of pesticide-associated runoff and landowners will have potentially beneficial BMP alterna-

## ods

storm runoff was achieved through controlled-release experiments in the summer of 1998. Both studies within the Mississippi Delta Management Systems Evaluation Area (MDMSEA) (Fig. 1) were conducted on a 50-m reach of a drainage ditch within the MDMSEA. With a top ditch width of 4.5 m, and a bottom width of 1.3 m, and a bottom depth of 1.3 m, and a bottom discharge during a simulated storm event of 3680 L h<sup>-1</sup>. Experimental results showed that 100% of the runoff point of entry, and 10, 20, 40, and 90 min of entry. A mixture of the herbicide atrazine, the insecticide lambda-cyhalothrin, and the insecticide lambda-cyhalothrin-3-(2-chlorophenoxy)benzyl-3-(2-chlorophenoxy)-2,2-dimethyl cyclopropane were used to simulate pesticide runoff from a 10-ha field. Sediment and plant samples were collected at 0 min, 60 min, 180 min, 24 h, 7 days, and 28 days. Sediment and plant samples were collected at all sampling intervals except 90 min. Atrazine and lambda-cyhalothrin are commonly used for pest con-

trol in corn (*Zea mays*) and cotton (*Gossypium hirsutum*). The dominant aquatic plant species present in the ditch included *Polygonum* sp. and *Leersia* sp.

In 1999, the ditch study was conducted on a 650-m vegetated agricultural drainage ditch leading to Thighman Lake, still within the MDMSEA. The ditch had an approximate top width of 4.5 m, and a water width and depth of 2.8 m and 0.35 m, respectively. Sampling sites were established at 10 m above the point of entry, 0 m (point of entry), and 25, 50, 75, 100, 200, 400 and 650 m below the point of entry. Two pyrethroid insecticides, lambda-cyhalothrin and bifenthrin ([2-methyl(1,1'-biphenyl)-3-yl]-methyl 3-(2-chloro-3,3,3-trifluoro-1-propenyl)-2,2-dimethyl-cyclopropanecarboxylate) were mixed and amended into the ditch, simulating pesticide runoff from a 20-ha field. Aqueous samples were collected every 15 min for 1.5 h, then again at 2 h, 3 h, 6 h, 12 h, 24 h, 7 days, 14 days, 30 days, 44 days, and 99 days. Sediment and plant samples were collected at all sampling intervals from 3 h to completion of study, as well as at 0 min. In both studies, pesticide mixtures were amended with only water (e.g. no sediment particulates added), estimating a worst-case concentration scenario. Bifenthrin, like atrazine and lambda-cyhalothrin, is commonly used for pest control in corn and cotton. *Ludwigia* sp. and *Lemna* sp. were the dominant aquatic flora in the Thighman drainage ditch. For both ditch experiments, pesticide concentrations were based on label application rates and potential pesticide runoff percentages (WACHOPE 1978). Samples of water, sediment, and plants

were collected spatially and temporally in both studies and analyzed according to BENNETT et al. (2000) for the presence of atrazine, lambda-cyhalothrin, and bifenthrin, according to the respective experiment.

## Results

### Atrazine

During the first 24 h following initiation of the simulated storm event on the Beasley Lake drainage ditch, 59–61% of the measured atrazine was associated with the ditch vegetation. Fourteen days after the simulation, atrazine aqueous concentrations in all five ditch monitoring sites were below the ecotoxicological threshold of 0.020 mg L<sup>-1</sup> (HUBER 1993). Measured mean percentages of atrazine in water, sediment, and plant were 15 ± 24%, 28 ± 23%, and 57 ± 21%, respectively, for the duration of the study (28 days).

### Lambda-cyhalothrin (Beasley Ditch)

Within just 3 h of the simulation event, 97% of the measured lambda-cyhalothrin was associated with ditch vegetation, while the remaining 3% was associated with the water phase. By the end of the study (28 days), 3% of the measured lambda-cyhalothrin was associated with sedi-

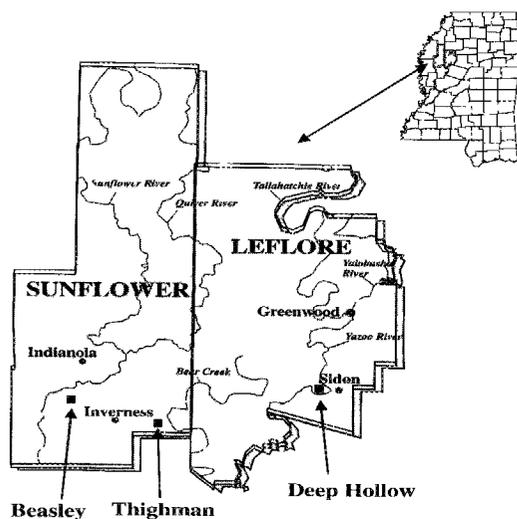


Fig. 1 Mississippi Delta Management Systems Evaluation Area (MDMSEA) watersheds in western Mississippi, USA.

ment, while 97% was associated with plant material. By end of the study, aqueous concentrations of lambda-cyhalothrin at each of the five monitored ditch sites were at, or below, the ecotoxicological threshold of  $0.00002 \text{ mg L}^{-1}$  (EXTOXNET 1996). Mean measured percentages of lambda-cyhalothrin in aqueous, sediment, and plant material at the end of the study were  $1 \pm 1\%$ ,  $2 \pm 1\%$ , and  $97 \pm 0.4\%$ , respectively.

#### *Lambda-cyhalothrin (Thighman Ditch)*

As with the 1998 lambda-cyhalothrin results, 96% of the measured lambda-cyhalothrin was associated with ditch vegetation only 3 h after initiation of simulation in the 1999 study. The remaining measured 4% was associated with the ditch sediment. Samples collected at 12 and 24 h indicated that between 94 and 99% of measured lambda-cyhalothrin was associated with the ditch vegetation. Lambda-cyhalothrin rapidly degraded in water concentrations throughout the length of the ditch within 24 h of the simulated storm event (Fig. 2). Aqueous concentrations in extreme downstream monitoring sites (200 m and beyond) were below the acceptable ecotoxicological threshold level 7 days after the simulation, with all monitoring sites recording concentrations below the threshold 30 days after the simulation. At the end of

the study (99 days), mean lambda-cyhalothrin percentages in water, sediment, and plant material were  $1 \pm 1\%$ ,  $12 \pm 16\%$ , and  $87 \pm 16\%$ , respectively.

#### *Bifenthrin*

Three hours after the simulation, 99% of the measured bifenthrin was associated with ditch vegetation. Similarly, samples collected at 12 and 24 h indicated that 98–99% of the measured bifenthrin was associated with plant material. Bifenthrin concentrations in water quickly degraded along the length of the ditch, 24 h after the simulated storm event (Fig. 3). Extreme downstream monitoring sites (400 m and 650 m) were at, or below, the acceptable ecotoxicological threshold level ( $0.00018 \text{ mg L}^{-1}$ ) within 24 h of runoff simulation. Within 30 days, all ditch monitoring sites recorded aqueous concentrations at, or below, the acceptable threshold. Mean measured percentages of bifenthrin in water, sediment, and plant at the end of the study were  $1 \pm 0.5\%$ ,  $18 \pm 28\%$ , and  $81 \pm 28\%$ , respectively.

#### Discussion

As evidenced by current research, ditch vegetation plays a significant role in sequestering pesticides associated with storm runoff from agri-

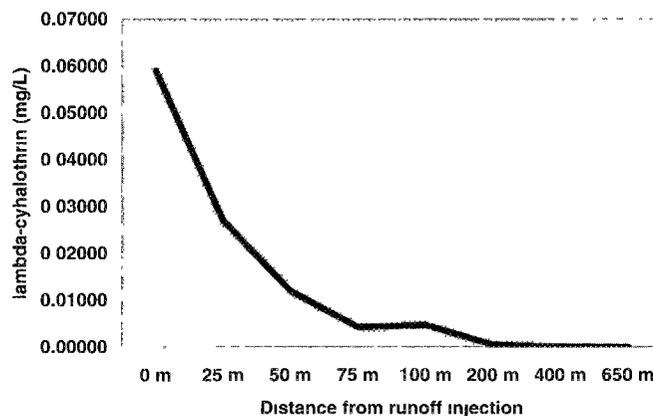


Fig. 2 Degradation of lambda-cyhalothrin in Thighman Ditch water during the first 24 h following runoff simulation, 1999

bifenthrin (mg/L)

Fig. 3. Degradation of bifenthrin in Thighman Ditch water during the first 24 h following runoff simulation, 1999.

cultural fields. Pesticides, heavily used in the Mississippi Delta and other agricultural areas, are a valuable part of the drainage ditch ecosystem. However, most drainage ditch management literature deals with ditch vegetation. In fact, in many European countries, the height of ditch vegetation is controlled for aesthetic purposes. In the US, ditch vegetation is often removed as much as possible. Usually this is to provide for better flow resistance during storms. However, research indicates that the vegetation within the ditch, as well as the pesticides may be mitigated. Ditches must still be maintained for water drainage, but ditch vegetation (and aquatic receiving systems etc.) will ultimately be

With the US national focus on the Clean Water Act (CWA) implementation of total maximum daily loads (TMDLs), the role of

s), mean lambda-cyhalothrin  
er, sediment, and plant mate-  
,  $12 \pm 16\%$ , and  $87 \pm 16\%$ ,

the simulation, 99% of the  
rin was associated with ditch  
rly, samples collected at 12  
d that 98–99% of the plant  
was associated with plant  
rin concentrations in water  
along the length of the ditch,  
mulated storm event (Fig. 3).  
eam monitoring sites (400 m  
at, or below, the acceptable  
hreshold level (0.00018 mg  
of runoff simulation. Within  
h monitoring sites recorded  
ations at, or below, the accept-  
can measured percentages of  
er, sediment, and plant at the  
ere  $1 \pm 0.5\%$ ,  $18 \pm 28\%$ , and  
ively.

urrent research, ditch vegeta-  
icant role in sequestering pes-  
with storm runoff from agri-



g the first 24 h following runoff

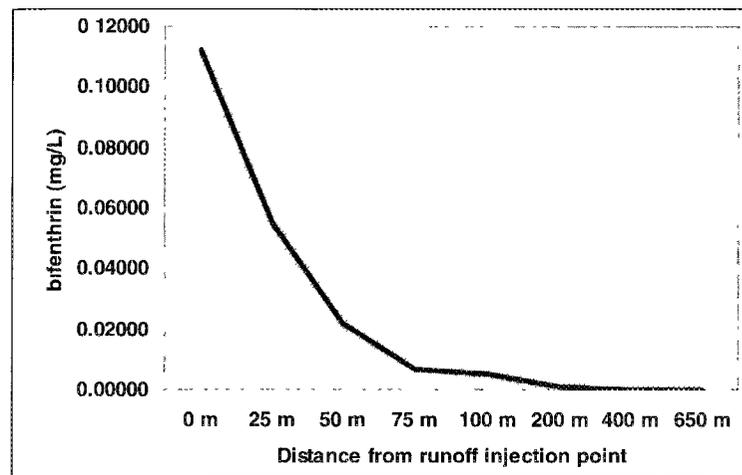


Fig. 3. Degradation of bifenthrin in Thighman Ditch water during the first 24 h following runoff simulation, 1999.

cultural fields. Particularly with pyrethroid insecticides, heavily used on cotton within the Mississippi Delta and other regions of the US, vegetation is a valuable component of the drainage ditch ecosystem. As mentioned previously, most drainage ditch research in the scientific literature deals with ditch vegetation management. In fact, it is a common practice in many European countries to selectively manage the height of ditch vegetation for drainage and aesthetic purposes. Many agricultural drainage ditches in the US are dredged or mowed to remove as much vegetation as possible. Generally this is to provide the least amount of water flow resistance during periods of drainage. However, research indicates that by allowing the vegetation to remain, to some degree, within the ditch, a significant amount of pesticides may be mitigated from stormwater runoff. Ditches must still perform their function of water drainage, but by allowing vegetation to remain in the ditch ecosystem, downstream aquatic receiving systems (rivers, lakes, streams, etc.) will ultimately benefit.

With the US national water quality interests focusing on the Clean Water Act and implementation of total maximum daily loads (TMDLs), the role of agriculture and its rela-

tion to water quality are at the forefront of public concern and policy. Agricultural scientists have been designing and continue to design new, innovative BMPs to increase the quality of agricultural stormwater runoff. Great strides have been made in this area in regards to stiff grass hedges, conservation tillage, and other BMPs. Now, with the proposed addition of agricultural drainage ditches, a holistic management water quality approach may be obtained. This research is unique because it emphasizes a new treatment concept – one encompassing processes in the field, at the edge-of-field, in the transitional flow zone, and the receiving waterbody. This concept goes beyond looking at a particular BMP by encouraging a suite of remediation tools for effective runoff mitigation. Farmers and landowners will be able to choose those practices that are both environmentally friendly and economically feasible. Some practices (e.g. constructed wetlands) may have associated costs that cannot be carried by all farmers. In those instances, perhaps a combination of management techniques, including agricultural drainage ditches, would prove most beneficial.

The scaling of drainage ditches is of utmost importance. Little to no information was previ-

ously available on the classification of drainage ditches. The research reported herein was conducted on relatively small drainage ditches, less than 5 m in top width. A novel ditch classification system is currently being proposed by FARRIS et al. (2000). The classification ranges from a primary ditch (less than 1 m in width) to a pentenary ditch (>10 m in width). Such pentenary ditches, also termed riverine ditches, may serve more for conducting water and less for mitigation of agriculturally related runoff. Early data suggest that smaller-scale ditches have a higher mitigation capacity for runoff than do larger ditches.

Drainage ditch research is relatively new, but vitally important. The present authors are currently examining several ditch ecosystem parameters, including refinement of the classification scheme, general water quality parameters, microbial activity, invertebrate and vertebrate assessments, nutrient load, and further pesticide mitigation capabilities. By incorporating a holistic approach to drainage ditch management, better decisions will result in improved water quality in downstream aquatic receiving systems.

### Acknowledgments

Authors thank F. DEEVER, R. E. LIZOTTE, JR., and C. T. BRYANT for review of this manuscript. Special thanks to L. ARRINGTON and J. HARRIS for their cooperation and use of equipment and drainage ditches. Thanks also to E. GWIN, T. WELCH, S. DAVIS, and J. GREER for field collection and laboratory analyses.

### References

- BARLING, R. D. & MOORE, I. D., 1994. Role of buffer strips in management of waterway pollution. A review. - *Environ Manage* 18: 543-558.
- BENNETT, E. R., MOORE, M. T., COOPER, C. M. & SMITH, S. JR., 2000. Method for the simultaneous extraction and analysis of two current use pesticides, atrazine and lambda-cyhalothrin, in sediment and aquatic plants. - *Bull Environ Contam Toxicol* 64: 825-833.
- BUTLER, R. M., MYERS, E. A., WALLER, J. N. & HUSTED, J. V., 1974. *Nutrient Reduction in Wastewater by Grass Filtration*. - Paper No. 74-4024. - American Society of Agricultural Engineers, St. Joseph, Michigan.
- DRENT, J. & KERNING, K., 1992. *Experimental Ditches for Ecotoxicological Experiments and Eutrophication Research*

- under Natural Conditions. A Technical Survey*. - DLO Winand Staring Centre. Report 65. Wageningen, The Netherlands.
- EXTENSION TOXICOLOGY NETWORK (EXTOXNET) database, 1996. Cornell University, Ithaca, New York. - <http://ace.orst.edu/info/extoxnet>
- FARRIS, J. L., MILAM, C. D., MOORE, M. T., COOPER, C. M. & SMITH, S. JR., 2000. *Characterization of Agricultural Ditch Ecosystems: Structure and Function of Constricted Remnant Wetlands*. - 3rd Annual Arkansas Soil and Water Education Conference. Jonesboro, Arkansas.
- GRUMBIS, B. H., 1991. Wetlands, drainage ditches, and the Clean Water Act. - *J Soil Water Conserv* 46: 174-177.
- HAYS, J. C. & HAIRSTON, J. E., 1983. *Modeling the Long-term Effectiveness of Vegetative Filters on On-site Sediment Controls*. - Paper No. 83-2081. American Society of Agricultural Engineers. St. Joseph, Michigan. 27 pp.
- HAYES, J. C., BARFIELD, B. J. & BARNHART, R. I., 1984. Performance of grass filters under laboratory and field conditions. - *Trans ASAE* 27: 1321-1331.
- HUBER, W., 1993. Ecotoxicological relevance of atrazine in aquatic systems. - *Environ Toxicol Chem* 12: 1865-1881.
- LEE, D., DILLAJIA, T. A. & SHEPHERD, J. H., 1989. Modeling phosphorus transport in grass buffer strips. *J Environ Eng* 115: 409-427.
- SCHRIFIBER, J. D., COOPER, C. M., KNIGHT, S. S. & SMITH, S. JR., 1996a. A management system evaluation area (MSEA) project for the Mississippi Delta. - In *Proceedings of American Water Resources Association Annual Summer Symposium Watershed Restoration Management*, July 14-17. - Syracuse, New York. 301-310.
- SCHRIFIBER, J. D., REBICH, R. A. & POTE, J. W., 1996b. The Mississippi Delta management systems evaluation area (MSEA) project. - In *Proceedings of the Sixth Federal Interagency Sedimentation Conference*, March 10-14. - Las Vegas, Nevada. Vol. 2. pp. VIII-91 - VIII-95.
- VAN STRIEN, A. J., VAN DER LINDEN, J., MELMAN, T. C. P. & NOORDEWIJF, M. A. W., 1989. Factors affecting the vegetation of ditch banks in peat areas in the western Netherlands. - *J Appl Ecol* 26: 989-1004.
- VAN STRIEN, A. J., VAN DER BURG, T., RIE, W. J. & STRUCKER, R. C. W., 1991. Effects of mechanical ditch management of the vegetation of ditch banks in Dutch peat areas. - *J Appl Ecol* 28: 501-513.
- WAUCHOPE, R. D., 1978. The pesticide content of surface water draining from agricultural fields - a review. - *J Environ Qual* 7: 459-472.

### Authors' addresses:

- C. M. COOPER, M. T. MOORE, E. R. BENNETT, S. SMITH, JR., USDA-ARS National Sedimentation Laboratory, PO Box 1157, Oxford, MS 38655, USA.
- J. L. FARRIS, Arkansas State University, Environmental Sciences Program, PO Box 847, State University, AR 72467, USA.

A comp

### Introduction

*Gloeotrichia echino* nitrogen-fixing, of the Order Nostoc large colonies composed of arranged in a spiral forming in the mid-akinete packages in tions become favorable colonies form, and they migrate up into potential impact of as they do not appear available in ISTVÁNOVICS et al. Instead, they have phosphorus acquisition.

*G. echinulata* is a ton species during den. During the been carried out of the pelagic population (1995).

This monitoring determine the bio the relative importance of recruitment parts of the sediment population and when start to decline. However, intensive labour and require skilled

The main goal of the handling of water, but also for was that the system laboratory equipment